


Product Features

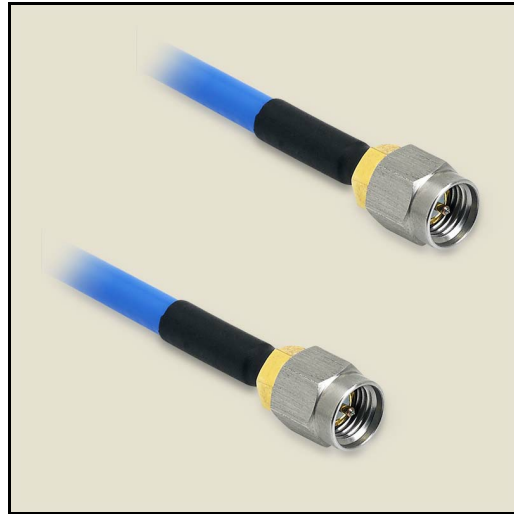

Electrical Specification: T_{Ambient} = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		18.0	
VSWR	DC to 1.0	1:			1.25	
	1.0 to 5.0				1.3	
	5.0 to 10.0				1.32	
	10.0 to 18.0				1.35	
Insertion Loss	DC to 1.0	dB/ft.			0.12	
	1.0 to 5.0				0.31	
	5.0 to 10.0				0.45	
	10.0 to 18.0				0.65	
Velocity Of Propagation		%		70.0		

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	SMA Male	
Connector 1 Coupling Nut	Passivated Stainless Steel	
Connector 1 Body	Gold Plated Brass	
Connector 1 Contact	Gold Plated Brass	
Connector 2	SMA Male	
Connector 2 Coupling Nut	Passivated Stainless Steel	
Connector 2 Body	Gold Plated Brass	
Connector 2 Contact	Gold Plated Brass	
Coax Cable	Conformable	
Cable Type	141CJ	
Cable Inner Conductor	SPCW	
Dielectric	PTFE	
Shield	1. Tinned Cu/Sn Braid	
Jacket	FEP	
Coax Diameter	0.168	
Minimum Bend Radius	0.38	
Length	96.0	

SMA Male to SMA Male cable assembly using 141CJ Conformable Coax, 96 inches long,
Operating to 18 GHz.



Parameter	Description	Notes
Operating Temperature	-85.0 to 200.0 °C	
RoHS Compliance	Yes	

Product Notes